



RJS ALUMINIUM



CONTENTS

ABOUT US 01

LOUVRE 03

FRAMELESS DOORS 05

SLIDING WINDOWS 07

AWNINGS WINDOWS/ CASEMENT 09

HINGED DOORS 11

BI-FOLD 13

DOUBLE HUNG WINDOW 15

SLIDING DOOR 17

ABOUT US

SYDNEY'S LEADING SUPPLIER OF ALUMINIUM WINDOWS AND DOORS FOR DOMESTIC AND COMMERCIAL APPLICATIONS.

At **RJS Aluminium**, utility and style combine, resulting in high quality windows and doors which provide optimum security, whilst also enhancing the appearance of your house or building.

Manufacturing to meet your unique specifications and aesthetic preference, RJS Aluminium guarantees quality workmanship across all products within our extensive range. Our unparalleled customer service also means that when you choose RJS Aluminium, your satisfaction is assured.

Since the company's inception, RJS Aluminium have custom designed and manufactured products for a range of outstanding projects, including **EDO project** by award winning architects Stanisc Associates, Luxury Residential Unit **SOHO Apartments** and **Cote d' Azur Apartments**.





LOUVRE

STRUCTURAL

The louvre mullion allows for multiple banks of louvres to be connected. RJS Louvres can be coupled to all other RJS products

AESTHETICS

No unpainted or exposed edge on the inside faces.

ADDITIONAL BENEFITS

An insect & security screen track is built into the frame.
The louvre frame can be coupled to other RJS products such as the French Door.



FRAMELESS DOORS

STRUCTURAL

Frameless glass doors and associated panels such as sidelines and highlights must be a minimum of either 10mm or 12mm toughened safety glass as per AS1288. It ensures that the doors will open and close smoothly for years to come.

Frameless glass doors can be installed with rails and/or patch fittings and come in a variety of finishes including anodised, powder coated, plated brass and stainless steel finishes. Marine grade stainless steel is recommended for where the air has a high salt content.

AESTHETICS

The frameless Door has been designed for maximum enjoyment of unobstructed views.





SLIDING WINDOWS

SIZES

RJS Sliding Windows are available in 48, 65 & 75mm frame sizes, in Finned & Face fix configurations.

STRUCTURAL

Hollow sections give added strength & security. Heavy Duty double rollers are standard on all RJS Windows, they last longer & operate smoother than conventional types.

Rounded Stiles add to the strength & will not catch on window furnishings.

Sash sits completely inside the frame which resists excessive rolling of the top & bottom Sash rail under high wind loads.

WEATHER

All RJS Sliding Windows achieve a minimum water penetration resistance rate of 250Pa.

Varying the sill type will achieve ratings up to 600Pa. All wind load categories are catered for Australia wide.

MAINTENANCE

Easy clean sill design.

Window cleaning is safer with the rounded edges.

AESTHETICS

- No unfinished or exposed edges
- No internal projection of transom sections.
- Sash rails top & bottom are concealed within the sill & frame.
- Genuine RJS handles, are ergonomically designed for ease of use for the elderly and disabled.
- The handles operate in the direction of the sash movement & are available in 4 colours.

OPTIONS

Multi- position vent locking.

Standard or barrel key locking available

Insect & security screens.



AWNINGS WINDOWS/ CASEMENT

STRUCTURAL

Hollow sections including Mullions & Stiles give added strength & security. 1000Pa Structural Rating on a 1500mm high x 1200mm wide along.

WEATHER

The RJS Awning windows will achieve a minimum water penetration rating of 300Pa.

AESTHETICS

Rounded stiles & rails

ADDITIONAL BENEFITS

Can accommodate Frictions Stays or Top Hung System & chain winder. Multiple bays can be added using a standard mullion.

OPTIONS

Insect & security screen.
Double Glazing



HINGED DOORS

STRUCTURAL

Strong hollow rails, stiles & mid-rails, give this Hinged Door the edge in strength & serviceability. The RJS Hinge Door can be coupled with all other RJS products.

WEATHER


Unique seal provides excellent sealing from the weather.

AESTHETICS

Rounded rolls help to give this door the classy yet structurally sound look. Available in various glazing options & styles.

ADDITIONAL BENEFITS

Individually glazed, federation style.

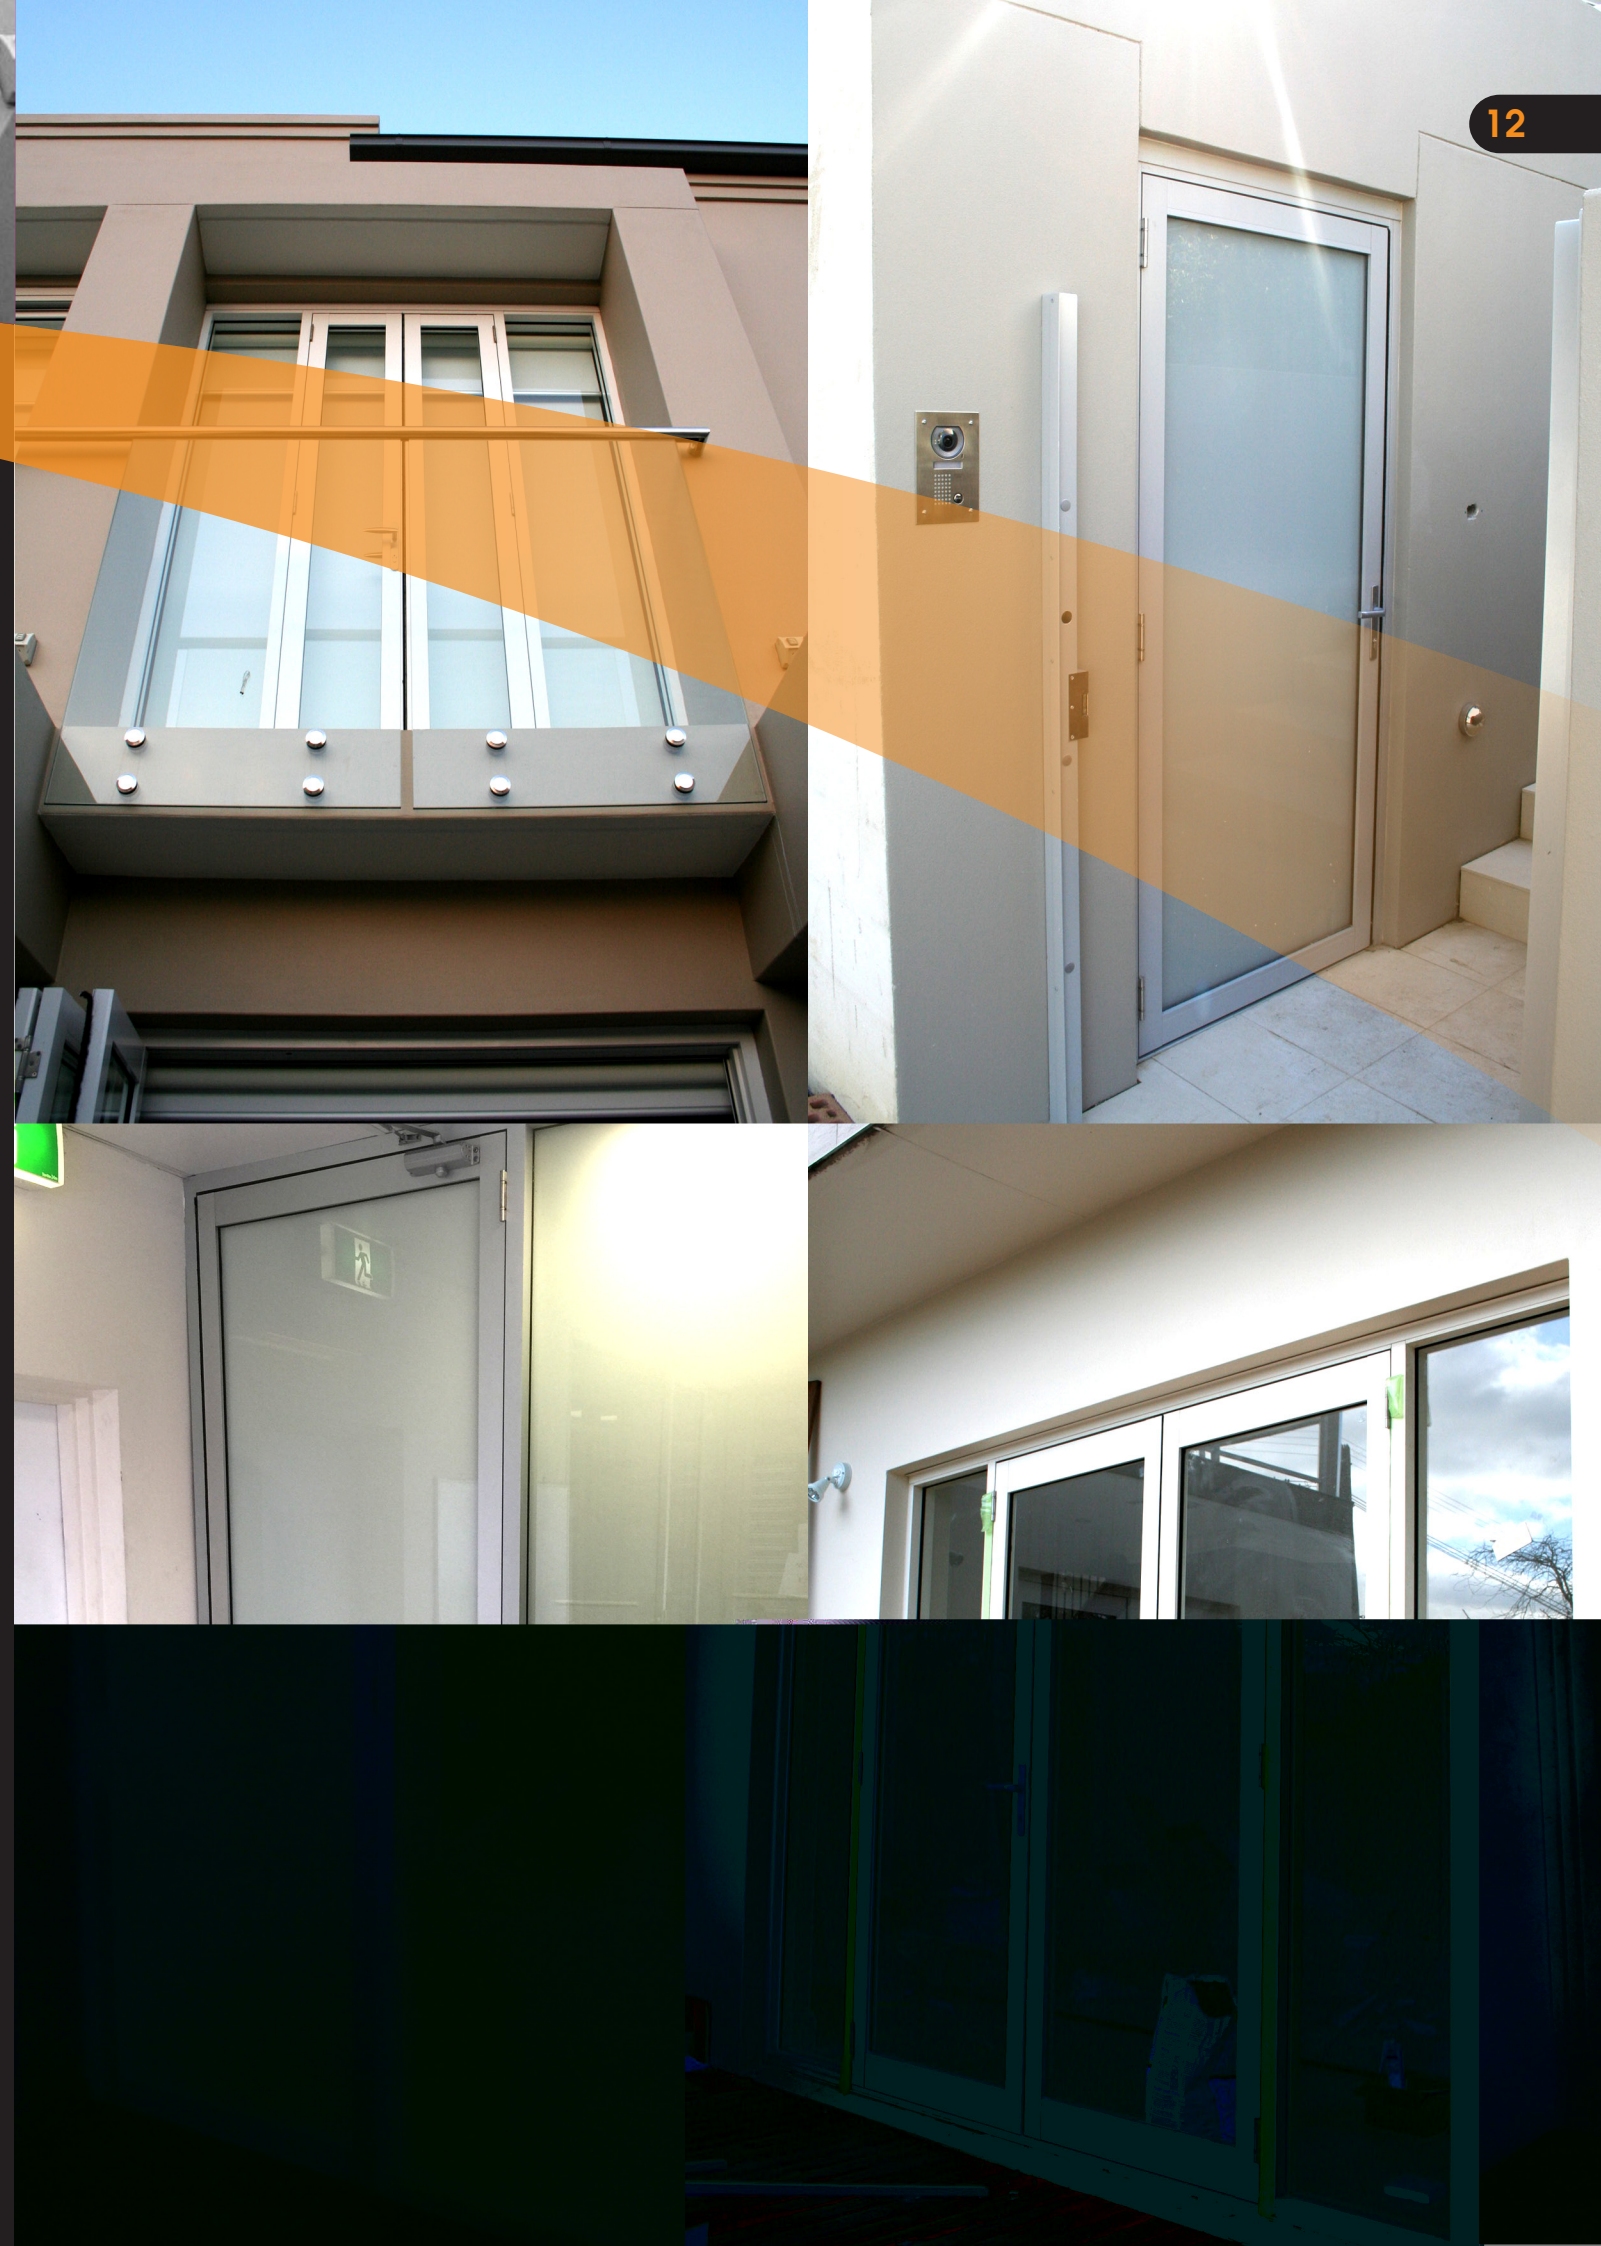



BI FOLD DOORS

STRUCTURAL

The Bi-fold Door has been designed for maximum enjoyment of unobstructed views. The custom designed heavy-duty hardware matches the door and framing that ensures that the doors will open and close smoothly for years to come. Bi-Folds Doors can be constructed in several configurations up to 6 panels and when fully open, the panels stack neatly to the side of the opening.

WEATHER

Unique seal provides excellent sealing from the weather.

AESTHETICS

Strong Aluminium Extrusions help to give this door the classy yet structurally sound look. Available in various glazing options & styles.

ADDITIONAL BENEFITS

Individually glazed, federation style.



DOUBLE HUNG WINDOW

STRUCTURAL

Hollow sections including Mullions & Stiles give added strength & security. 1200Pa Structural Rating.

WEATHER

The RJS Double-Hung Window will achieve a water penetration rating of 200Pa

AESTHETICS & BENEFITS

2 sash types are available, standard & federation wide stile.

Standard hollow rails for added strength.

- Stiles are flush to the jambs offering clear sight lines.
- Built in extruded handles in both top & bottom sashes.
- Removable security & insect screens from inside the building.

Federation (Wide Stile)

- Removable security & insect screens from inside the building.
- Wide sash stiles replicate that of timber double hung.
- Dual colour combinations - ie, sash different to frame.
- Decorative horns.





SLIDING DOOR

SILL TYPES

300 Pascal rated sill (Water Penetration)
 450 Pascal rated sill (Water Penetration)
 600 Pascal Sub Sill combination (Water Penetration)
 150 Pascal Sill (Low Profile)
 Non rated Wheelchair Sill (1:8 Slope)

MULLIONS & INTERLOCKS

Available in Standard duty = 1000 Pa serviceability.
 Heavy Duty = 2200 Pa serviceability.
 Region D = Cyclonic Rating.

STRUCTURAL

Hollow sections including Mullions & Stiles give added strength

AESTHETICS

No unfinished or exposed edges.
 Rounded Interlocks lock better than conventional "T" type & are less likely to catch on furnishings.

ADDITIONAL BENEFITS

Low profile sill available for Disabled &/or Nursing home applications.
 Maximum Door Height 2700mm.
 The door can coupled to other RJS products.

OPTIONS

Insect & security screens.
 Double Glazing.





ADDRESS 5 Cottam Avenue
Bankstown NSW 2200

TELEPHONE (02) 9796 1944

FAX (02) 9796 1944

ENQUIRIES enquiries@rjsaluminium.com.au

SALES sales@rjsaluminium.com.au